

The AGI logo is located in the top right corner of the image. It consists of the letters "AGI" in a bold, white, sans-serif font, followed by a stylized graphic element resembling a wing or a signal icon.The AGI logo is positioned on the left side of the image, overlaid on a green background. It features the letters "AGI" in a bold, white, sans-serif font, accompanied by a stylized graphic element.

STRUCTURES



TOWERS

AGI's lineup of towers are designed and approved specifically for your application. Our standard leg towers and support towers are completely free-standing with no guy wires to clutter your facility. Each tower is strength-staged for area wind loads to 105 MPH or above. All AGI towers are designed with velvet gray polyester powder coat finish standard, tubular steel construction, and prefabricated bolt-together modular design for economical shipments.

Tower sizes

Larger towers are available to support multiple bucket elevators. Towers with smaller sides are more suitable for supporting catwalks.

Along with our square towers we offer space saving rectangular towers.

T2 TOWER SIZE CHART


SIZE	A OR B
2'	1' 8"
610 mm	508 mm
*only available in a rectangle tower	
4'	3' 8"
1,219 mm	1,118 mm
6'	5' 8"
1,829 mm	1,727 mm
8'	7' 9"
2,438 mm	2,362 mm
10'	9' 8"
3,048 mm	2,946 mm
12'	11' 8"
3,658 mm	3,556 mm
14'	13' 8"
4,267 mm	4,166 mm
16'	15' 8"
4,877 mm	4,775 mm
20'	19' 11 ⁵ / ₈ "
6,096 mm	6,086 mm
*only available in a square tower	

Available in both square and rectangle towers expect where noted otherwise



The most common bucket elevator support towers are:

8 ft x 8 ft	10 ft x 10 ft	12 ft x 12 ft
-------------	---------------	---------------

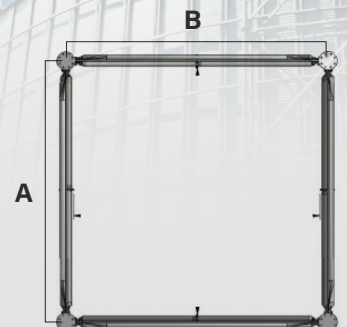

Two leg tower

- Ideal for space restricted areas
- Tie off packages available to AGI bins
- Used on bins with up to a 30' eave to peak height
- Uniform size throughout entire tower for ease of assembly

OPTIONS

Mid mount platforms are adjustable up and down in 3" (76 mm) increments. A level walk-in entrance to the platform is possible when paired with access braces and platforms on AGI stairs or ladders.

Tower stairs access platforms

Add-on tower stairs access platforms combine with switchback stairs platforms to allow easy access to mid mount platforms.

Tower ladders and ladder platforms

OSHA compliant with cage as well as large and sturdy rest platforms spaced every 20' (6.1 m) apart. Rest platforms feature self closing safety gates and optional add-on access platforms.

Tower stairs gate

The easy installation design has pre-drilled holes for right-handed or left-handed opening and it features a sliding lockable latch.





STAIRS

Switchback stairs

Switchback stairs are recommended when there is equipment such as catwalks or bucket elevators located outside the tower.

Wrap around stairs

Recommended only when all of the equipment is located inside the tower.

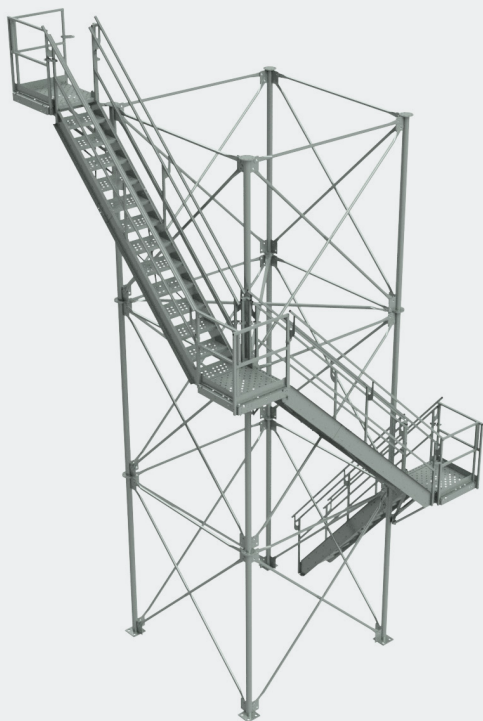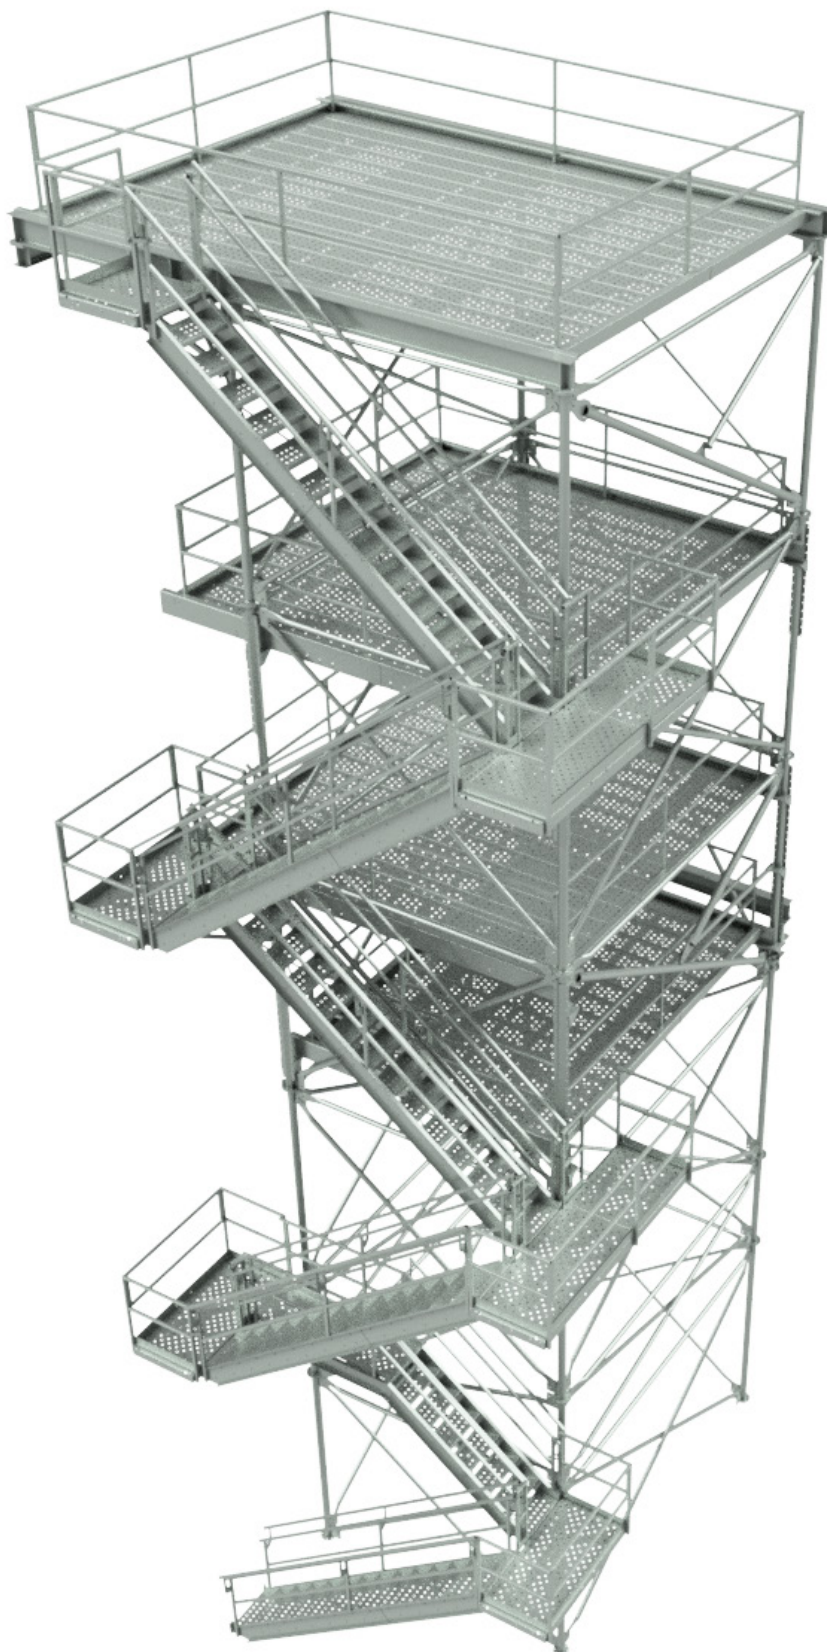




CATWALKS

AGI manufactures a variety of catwalks that can cover any area of your conveyor support needs, from under truss designs to our popular hand-rail truss for longer spans with bigger conveyors. We also offer a commercial-grade thru truss for those extra-long spans with multiple conveyors on one common catwalk.

All AGI conveyor supports are manufactured from high strength square or rectangular tube and come in two finishes; standard powder-coat grey and hot-dip galvanized.

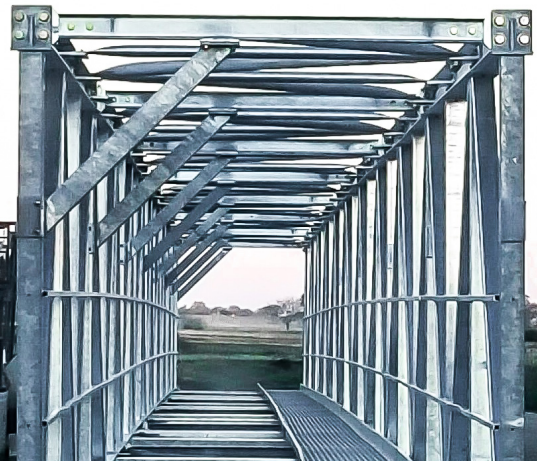

Thru truss

The AGI thru truss catwalk is designed for even heavier loads and longer spans.

- Up to 160' span and up to 800 lbs per foot conveyor weight





6 series catwalk

Our 6 series catwalk is a versatile solution to accommodate various free spans and conveyor loads. The knockdown design provides for significant savings on transportation costs.

Available in four grades:

6A, 6B, 6C, and 6D

Conveyor mounting areas up to 6'

6A and 6B: 20", 30", 44" and 60"

6C and 6D: 30", 44", 60" and 72"

FEATURES

- Rigid, double truss design
- Engineered for free spans up to 120'
- Different grades to fit specific applications
- Capable of conveyor loads to 700 lbs per foot
- Enlarged drop-through openings
- Knock-down design for economical shipping
- 3', 6', 9' and 18' sections available

RS series catwalk

The RS series catwalk meets the requirements of most on-farm and country elevator grain storage and handling systems.

FEATURES

- RS42 catwalk is for rigid free spans up to 75'
- RS64 catwalk is for rigid free spans up to 69'
- Square tubular handrail
- Under truss design allows alteration of handrails without sacrificing integrity of catwalk
- 24" conveyor mounting area
- Optional walk-around platform
- 3', 6', 9' and 18' sections available



AGI is a global leader in supplying farm and commercial customers with the manufacturing, planning, and engineering of full equipment solutions for grain, seed, fertilizer, feed, and food. AGI's expertise enables the storage, blending, mixing, conveying, conditioning, processing, and protection of agricultural products and inputs worldwide.

Your safety is our highest priority.

Please read and understand the operator's manual and safety decals before using. Use and maintain products properly, and do not modify. Keep guards in place when operating and follow all product manuals and safety decals. For all AGI products, if guards, safety decals, or manuals are damaged or missing, contact your AGI sales or dealer representative for replacements. Images and information contained in this brochure are presented for general information.

AGI and the furrows symbol are trademarks belonging to Ag Growth International Inc.

198 Commerce Drive, Winnipeg, Manitoba, Canada R3P 0Z6

P 308.384.9320 | TF 800.247.6621

     @aggrowthintl

AGGROWTH.COM